

## AUTO GRINDER MODEL SPECIFICATIONS

From base to cutting knife, Autio Grinders are built to provide dependable, trouble-free production. Our grinders are available in 6", 8", 11" and 16" plate sizes and 15-150 hp motors, with a capacity of up to 60,000 lbs per hour! With a variety of available grinder styles, we can design a custom configuration to best suit for your production needs!

Specification	1601	1101GH	801GH	1101GHP	801GHP	1101-H	801-H	801P4	1101P4
Diameter of Plate	16"	11"	8-5/8"	11"	8-5/8"	11"	8-5/8"	11"	8-5/8"
Height	60"	50"	50"	50 1/4"	50 1/4"	23-1/2"	23-1/2"	45"	45"
Width	39"	31"	30"	28"	28"	28"	28"	58"	58"
Length	112"	117"	107"	80-1/2"	80-1/2"	68"	68"	64"	66"
Clearance under barrel	34"	30-1/2"	30-1/2"	30"	31"	4"	4"	30"	30"
Hopper size	30 x 32"	27"x21"	27"x21"	29"x21"	29"x21"	29"x21"	29"x21"	29"x21"	29"x21"
Length of screw	55"	42"	42"	42"	42"	42"	42"	42"	42"
Weight	7000 lbs	3400 lbs	2400 lbs	2400 lbs	2200 lbs	1000 lbs	1000 lbs	1500 lbs	1500 lbs
Motor sizes	100 HP	75/100HP	25/60/50HP	15/25/40/50HP	25/60/50HP	CharLynn 10,000 Hydraulic	CharLynn 10,000 Hydraulic	15-50HP	15-50HP
Capacity * (Lbs per hour)	60,000	25,000	15,000	25,000	15,000	20,000	15,000	15,000	25,000

\*Capacity will vary depending on product application

### 7 reasons you get GREATER PRODUCTION at LOWER COST with AUTO Grinders

1. BIG CAPACITY . . . hopper holds up to 100 lbs at a time.
2. FASTER FEEDING . . . automatically without clogging or jam-ups.
3. NO HEAT BUILD-UP or product "cooking" .
4. COMPLETE GRIND CONTROL with patented screw and barrel design.
5. QUICK CLEAN-UP to meet all U.S.D.A. standards
6. GREATEST FLEXIBILITY . . . 25 - 100 HP with varying feeds & RPM.
7. REAL DEPENDABILITY and no down-time with Falk Gear Box .



93750 Autio Loop • Astoria, Oregon 97103 • USA  
Phone: (503) 458-6191 • 800-483-8884  
Fax (503) 458-6409 • E-Mail: office@autioco.com

## Autio Grinders

FOR OVER 50 YEARS, AUTIO GRINDERS HAVE MET THE TEST OF RELIABILITY, HIGH PERFORMANCE AND COST EFFECTIVENESS. AUTIO OFFERS SEVERAL GRINDER MODELS TO MEET YOUR PRODUCTION NEEDS. MOST AUTIO GRINDERS CAN BE FITTED WITH AN OPTIONAL VANE PUMP TO GRIND AND TRANSFER YOUR PRODUCT IN ONE PROCESS.

- ✓ HIGH PERFORMANCE
- ✓ UP TO 60,000 LBS/HOUR
- ✓ EASY CLEAN-UP
- ✓ USDA STANDARDS
- ✓ HIGH CAPACITY HOPPERS
- ✓ PATENTED SCREW & BARREL
- ✓ AVAILABLE WITH PUMP ATTACHED
- ✓ CUSTOM BUILT TO ORDER

### GHP (GEAR HEAD PULLEY) MODEL

High capacity, high performance

Gear Box and Pulley system allows varying speeds and RPM for maximum flexibility

Dependable Falk Gear Box reduces downtime



### P-4 PULLEY MODEL

Flywheel-style belt and pulley drive  
Low cost, high production  
No gearbox required



### HYDRAULIC MODEL




Dependable Hydraulic Power  
Ideal for processors and factory ships  
Optional Power Supply available.

Call us today at  
(800) 483-8884  
for a quote on a  
custom grinder  
configuration for  
your processing  
needs!

### GH (GEAR HEAD) MODEL

In-line motor mounted as Direct Drive  
Fixed speed & Power  
No Belts or pulleys

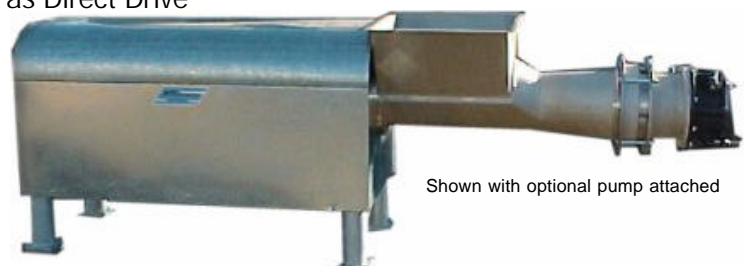

Shown with optional pump attached